

QUICK
START
GUIDE

gizmosmart
Be in control. Anytime, Anywhere

《Connected Gateway》

GS-CG-Z001



Setup Connected
Gateway



Register on
GizmoLife App



Add Smart
Devices



Connected Gateway helps you to connect with all your sensors and allows you to control them from your smart phone.


It has an inbuilt alarm system and comes with battery backup, thus providing complete security for your home and loved ones.

Step 1: Setup Connected Home Gateway >>

Connect your Connected Gateway to the internet router using the Ethernet cable, and power it up using the power adapter provided in the pack.

Parts Identification

- 1 USB Port
- 2 Reset/ Scan Button
- 3 Ethernet Port
- 4 DC Power Jack
- 5 Battery Switch

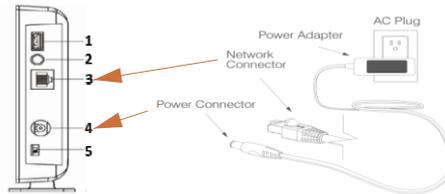

Step 2: Register on Gizmo Life App

Install GizmoLife App from App store and click on “Register Now” to create Log-in

Download the app



Register and verify Email to Log-in

New user registration


The screenshot shows a mobile app interface for "New user registration". At the top, the "gizmoLife" logo is displayed in red and blue, with the tagline "Access to a better life for your projects & you." below it. There are three input fields: "Name", "Email Address", and "Password". Below these fields is a red button labeled "Register". Underneath the button is the text "OR" and three social media icons: Facebook (blue circle with white 'f'), Google+ (red circle with white 'G+'), and Twitter (blue circle with white bird). The screen also shows a status bar at the top with the time 5:06 and various icons, and an Android navigation bar at the bottom.

Step 3: Adding Connected Gateway

Once you click on Smart Home Solution, you will get an option to Setup Smart Home

Step A

Login and click on Smart Home Solution

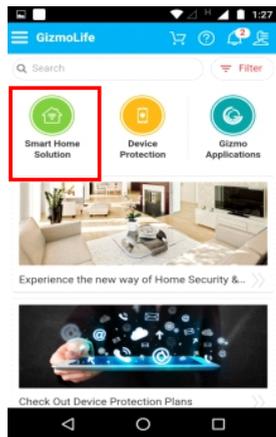


Step 3: Adding Connected Gateway

Once you click on Smart Home Solution, you will get an option to Setup Smart Home

Step B

Click on Setup Smart Home to configure Connected Gateway

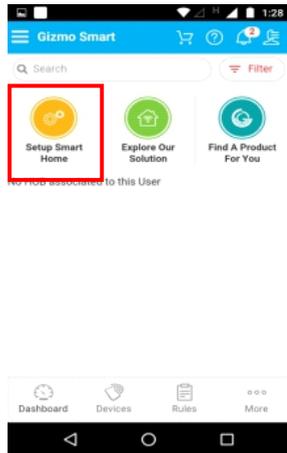


Setting up Connected Gateway >

Fetch Current Location

Step A

Turn ON GPS on your mobile to fetch current location.

Give a Location name and click next

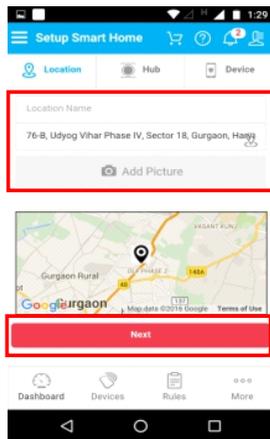

Setting up Connected Gateway


Step B

- Enter Connected Gateway name
- Click on “Scan Details” to enter Mac Address

MAC Address
001D94:0583CB

- Click “Next” to add Connected Gateway


Scan QR code to enter MAC address

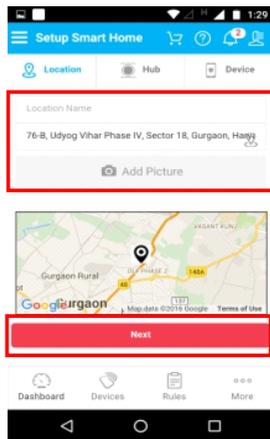

Connected Gateway Added Successfully >>


Add Devices

- Connected Gateway is ready to add smart devices.
- Kindly refer to each device manual included in the box.
- Wish you a happy and safer home.

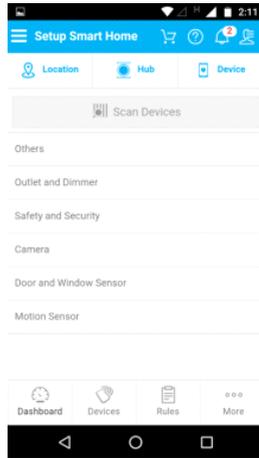

Connected Gateway Added Successfully

Dashboard

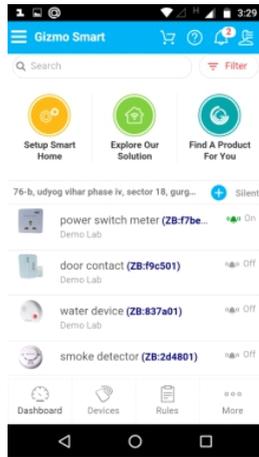


Led Indication >

1. LED 1 (Green/Red)

- LED 1 Green On – AC Power Normal
- LED 1 Red On – AC Power Failure
- LED 1 Red Slow Flash – Battery Disconnected
- LED 1 Red Quick Flash – Low Battery

2. LED 2 (Red/Amber)

- LED 2 Red Flash – System Alarming
- LED 2 Red On – Alarm in Memory
- LED 2 Amber On – Fault Events in System

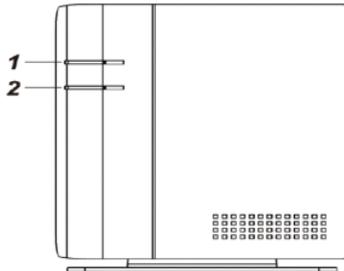

Factory Reset >>

- You can clear all defined parameters in the Connected Home Gateway and reset it to Factory Default.
- Once the **Factory Reset** is executed, all the programmed settings will be replaced by default values.
- Value and all the learnt-in devices will be removed.
- You will need to restart the programming and learning process again.
- **Step 1.** Disconnect the AC adaptor, slide battery switch to OFF.
- **Step 2.** Press and Hold the reset button and connect the AC adaptor to the Control Panel. All 3 LEDs will turn on for 10 seconds.
- **Step 3.** Keep holding the reset button for 30 seconds then release. After 10 seconds, the Control Panel will restart and all 3 LEDs will turn on.
- **Step 4.** Wait for 10 seconds and all 3 LEDs will turn off to indicate factory reset is complete.
- For more support, visit: <http://support.gizmosmart.com> or call +91-9876298763

Corporate Office : Kochar Infotech Pvt. Ltd. 76-B, Udyog Vihar, Phase-IV,
Gurgaon, 122 001, India

www.gizmosmart.com • info@gizmosmart.com • +91 98762 98763